

Air Treatment

Oil Mist Eliminator




Ultra Clean Air

The Kaeser Oil Mist Eliminator (OME) is a coalescing filter with oversized pressure vessel and filter, designed to provide excellent filtration and protection with extremely low differential pressure. In a typical 100 psig air system, 72% of the oil aerosols (by weight) present are less than 5 microns in size and 50% are below 1 micron in size. Droplets of this size pass right through mechanical separator and many air line filters. Kaeser OME's have been specifically designed to remove these oil aerosols down to 0.5 ppm w/w.

Low Operating Costs

The OME has a pressure drop of 0.5 to 1 psid. Other coalescing filters typically lose 3 to 6 psid. Operating the air compressor at higher pressures to compensate for this increases power consumption 1% for every 2 psi increase in pressure. The OME's extremely low pressure drop yields a 1 to 2.5% energy advantage. In addition, its large in-depth bed provides much longer element life than in conventional oil removal filters. With a minimum 5 year warranty and filter life up to 15 years, the OME is virtually maintenance free!

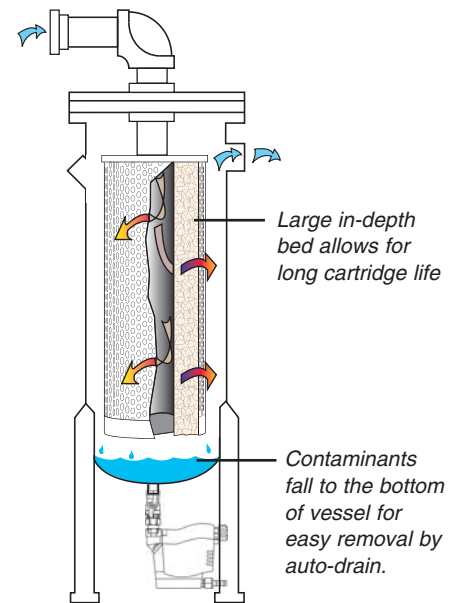

Features:

- Heavy-duty pressure vessel meets ASME standards
- Oversized long-life coalescing filter cartridge for super low pressure drop
- Differential pressure gauge for checking filter life
- Integral steel floor stand simplifies installation

Optional Features:

High precision differential pressure gauge

Recommended Accessory:

AMD 6550 or Eco-Drain condensate drain to automatically remove oils, moisture, and other contaminants from the air system

Extra Breakthrough Protection

The OME's large vessel is designed to capture and retain large volumes of oil and water if present, thus protecting downstream equipment from contamination caused by oil or water slugging.

Advanced Technology

Compressed air is directed through a loosely packed bed of highly engineered, water resistant glass fibers. Water droplets and oil aerosols entrained in the air stream are captured by the filter fibers through direct interception, inertial impaction, and diffusion interception resulting from Brownian motion. The captured liquids move along the fibers and coalesce into larger droplets that fall to the bottom of the housing where they are removed by a condensate drain (sold separately).

Sizing

Maximum air flow at 100 psig is indicated in the Specifications Table. To determine maximum air flow at pressures other than 100 psig, multiply the flow @ 100 psig by the multiplier in the Multiplier Table that corresponds to the minimum operating pressure at the inlet of the filter.


Technical Specifications

Model	Flow @ 100 psig (scfm)	Replacement Cartridge	Dimensions H x W (in.)	Conn. (in.)	Wt (lb.)
OME 125	125	OME 1	40 x 17	2 NPTF	194
OME 250	250	OME 2			200
OME 500	500	OME 3	52 x 18	2½ NPTF	231
OME 1100	1100	OME 4	77 x 26		368
OME 1500	1500	OME 5	85 x 27	4 FLG	410
OME 2100	2100	OME 6	94 x 33		735
OME 2400	2400	OME 7			751
OME 3000	3000	OME 8			767

Maximum working pressure: 150 psig. Maximum operating temperature: 150°F

Specifications are subject to change without notice.

Compressed Air System with Oil Mist Eliminator

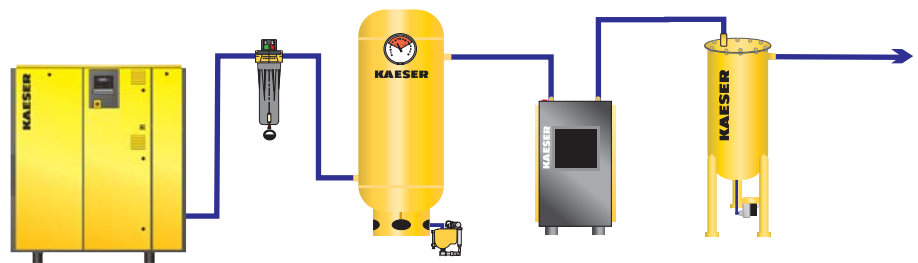

Multiplier Table

Operating Pressure (psig)	60	80	90	100	110	125	145	150
Capacity Correction Factor	0.65	0.83	0.91	1.00	1.04	1.10	1.18	1.20

KAESER COMPRESSORS

Built for a lifetime.™



www.kaeser.com

Kaeser Compressors, Inc.
511 Sigma Drive
Fredericksburg, VA 22408 USA
Telephone: 540-898-5500
Toll Free: 800-777-7873
info.usa@kaeser.com

Kaeser Compressors Canada Inc.
3760 La Verendrye Street
Boisbriand, QC J7H 1R5 CANADA
Telephone: (450) 971-1414
Toll free: (800) 477-1416
info.canada@kaeser.com

Kaeser Compresores de México S de RL de CV
Calle 2 #123
Parque Industrial Jurídica
76100 Querétaro, Qro.
Telephone: 01 (442) 218 64 48
sales.mexico@kaeser.com

Kaeser Compresores de Guatemala y Cia. Ltda.
Calz. Atanasio Tzul 21-00, zona 12
El Cortijo II, Bodega 501
01012-Guatemala City
Telephone: +502 2412-6000
info.guatemala@kaeser.com

Certified Management Systems

